

Umbrosa Product List 2010














The Ingenua shade sails are to be used under normal weather circumstances and have a wind rating up to 70 km/h. During heavy rain or hail and stronger winds, the sails must be removed



- The dimensions stated are measured from sail ring to sail ring. Dimensions may vary slightly
- Every sail comes with the necessary ropes and tension wrappers.
- The Sails can also be ordered separately and used without the Ingenua Pole System


TRIANGLE SAILS



INSAIT400	4X4X4 m 6.1 m ²	PREMIUM STANDARD	
		LIMITED EDITION STAND	
		SHADOW STANDARD	
INSAIT500	5X5X5 m 9.8 m ²	PREMIUM STANDARD	
		LIMITED EDITION STAND	
		SHADOW STANDARD	

Colour collections on the next page - Special colours surcharge of


SQUARE SAILS



INSAIS300	3X3m 7.8 m ²	PREMIUM STANDARD	
		LIMITED EDITION STAND	
		SHADOW STANDARD	
INSAIS400	4X4 m 13.8 m²	PREMIUM STANDARD	
		LIMITED EDITION STAND	
		SHADOW STANDARD	


Colour collections on the next page - Special colours surcharge of

RECTANGLE SAILS



INSAIR4X3	3X4 m 10.4 m²	PREMIUM STANDARD	
		LIMITED EDITION STAND	
		SHADOW STANDARD	
INSAIR5X3	3X5 m 13.0 m ²	PREMIUM STANDARD	
		LIMITED EDITION STAND	
		SHADOW STANDARD	
Colour collections on the next page – Special colours surcharge of			

PENTA SAILS




JEN JEN	3 ,5m Point to Point	PREMIUM STANDARD	
INSAIP350		LIMITED EDITION STAND	
	19.3 m²	SHADOW STANDARD	

Colour collections on the next page – Special colours surcharge


PRIVACY & WINDSAIL



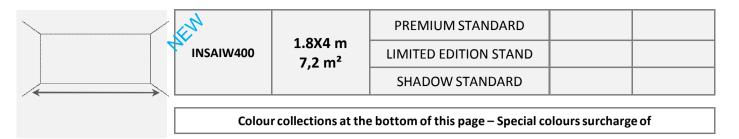

COLOUR OPTIONS

PREMIUM STANDARD – 3 Yr limited warranty

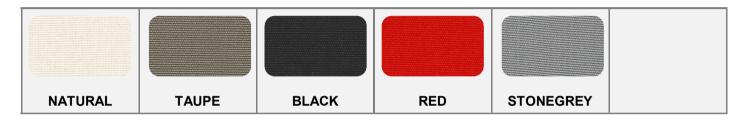

PREMIUM SPECIAL (SURCHARGE!) - 3 Yr limited warranty




LIMITED EDITION STANDARD - 3 Yr limited warranty



LIMITED EDITION SPECIAL (SURCHARGE !) - 3 Yr limited warranty



SHADOW STANDARD - 2 Yr limited warranty




I .		·	_	, ,
POLE SYSTEM			ING	ENU4
\$\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	INPOSS260A0075EW	Pole 260 cm - for one or maximum two sails – pole can be used for 75° and for 90° installation – anodised aluminium – every pole contains the new patented sliding unit Attention: for two sails on one pole, always install 90°		
POLE INSTALLATIO	N 75°			
	INFIXS215G7500RO	Round Support 75° installation of a pole under 75° on a hard surface (wood – stone – concrete) Attention: can be combined with base plate		
	INFIXC075G000000	Concrete Anchorage 75° –to install the pole in "soft" surface pouring concrete.		
**	UMFIXSCREW00000	Ground screw – to be screwed into the ground – Attention: can not be used in every soil! (Rocky & hard soil excluded)		
POLE INSTALLATIO	N 90°			
90°	INFIXS215G9000RO	Round Support 90° installation of a pole under 75° on a hard surface (wood – stone – concrete) Attention: can be combined with base plate		
	INFIXC090G000000	Concrete Anchorage 90° –to install the pole in "soft" surface pouring concrete.		
* J	UMFIXSCREW00000	Ground screw – to be screwed into the ground – Attention: can not be used in every soil! (Rocky & hard soil excluded)		
POLE ACCESSOIRIE	:S			
	INEASSTEP0000000	Easy step – foldable step to be installed for easy reach – perfect for easy reach		
	INSLA0000000000	Extra <u>sliding unit</u> – to attach a second sail on a pole; Attention: one sliding unit is standard included with every pole or wall mount.		
	INFIXBSL0B000000	Base plate allows easy removal of round support during winter.		
>	INEASWINCH000000	Easywinch – rope system allowing easy and fast removal and tension of the sail.		
	INFIXROPESET0000	Extra Rope kit (contains 2m of rope and tension wrapper)		
WALL INSTALLATION				
NAME OF THE PROPERTY OF THE PR	INFIXWAWINCH0000	Fixed Wallkit – allows installation on the wall at a high point – includes fixation point and wall unit with rope holder – stainless steel – Attention: the bolts included are not appropriate for all surfaces		
NNA PROFIE	INFIXW165SLI0000	Flexible Wallmount – 160 cm long wallmount allowing flexible sail positioning on the wall – includes sliding unit – anodised aluminium - Attention: the bolts included are not appropriate for all surfaces		

This overview gives you some examples of the endless possibilities of the Ingenua shade sail system. For every configuration the necessary items are listed. If you need more information or if you have specific demands do not hesitate to contact us info@umbrosa.be

SQUARE FREESTANDING






Ingenua Pole 260 cm	4 x
Pole Installation 75° (Concrete anchorage or ground screw)	4 x
Square 4x4	1 x

SOUARE & TRIANGLE COMBINATION FREESTANDING






Ingenua Rohr260 cm	6 x
Pole Installation 75° (Concrete anchorage or ground screw)	5 x
Pole Installation 90° (Concrete anchorage or ground screw) = for 2 sails always install common pole 90°	1 x
Square 4 x 4	1 x
Triangle 4 x4	1 x

TRIANGLE COMBINATION WALLMOUNT





Ingenua Pole 260 cm		1 x
Pole Installation 75° (Concrete anchorage or ground screw)		1 x
Fixed Wallkit		2 x
Triangle 5 x 5		1 x