Markilux Pergola Compact



EMAIL: ENQUIRIES@SAMSONAWNINGS.CO.UK TELEPHONE: (01933) 448844 MON - FRI 8:30AM - 5:30PM





The markilux shadeplus
Blocks out glare from the sun
and prying eyes in an instant.



An "all-round" achievement
The square, compact cassette protects
the awning cover all round.



mx_pergola compact

A certainty. Anywhere. For anyone.

markilux pergola compact

The pergola compact unites the graceful shape of the classic pergola with state-of-the-art product design and sophisticated technology. This compact, space-saving awning system on slender support posts and with lateral guide tracks, which always keep the cover taut, is ideal for smaller patios. The pergola compact invites you to linger and relax. Attractive and functional solar protection. Anywhere. For anyone.



Awning system

max. 450 × 400 cm

Options

shadeplus / drop valance, protection against wind and prying eyes as well as a number of comfort and design options, page 56






Always in the best light

Highlight your patio with LED Spots attached to the cassette or LED Line in the cassette, on the guide tracks or in the light bar which will guarantee endless hours of pleasure outdoors – even long after the sun has set.

markilux designer awnings

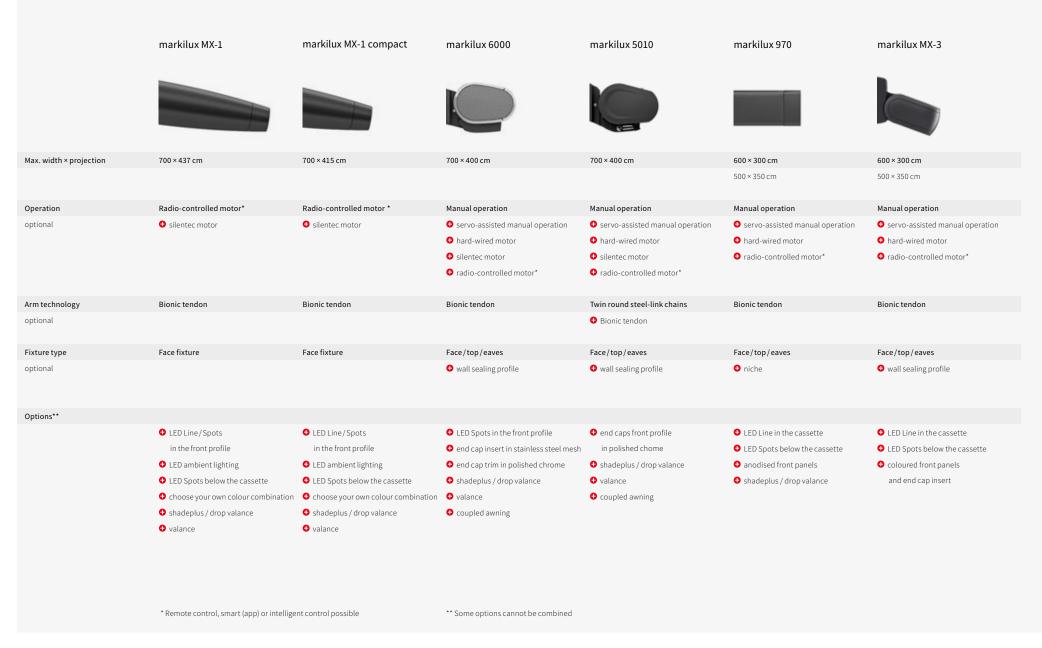



markilux 990	markilux 3300	markilux 1710	markilux 1600	markilux 930	markilux 1700	markilux 1300	
						3	
500 × 300 cm	700 × 400 cm	700 × 350 cm	710 × 400 cm	500 × 300 cm	700 × 400 cm	700 × 400 cm	
Manual operation	Manual operation	Manual operation	Manual operation	Manual operation	Manual operation	Manual operation	
• servo-assisted manual operation	• servo-assisted manual operation	• servo-assisted manual operation	• servo-assisted manual operation	• servo-assisted manual operation	• servo-assisted manual operation	• servo-assisted manual operation	
• hard-wired motor	• hard-wired motor	• hard-wired motor	• hard-wired motor	• hard-wired motor	• hard-wired motor	• hard-wired motor	
• radio-controlled motor*	• silentec motor • radio-controlled motor*	• radio-controlled motor*	• radio-controlled motor*	• radio-controlled motor*	• radio-controlled motor*	• radio-controlled motor*	
Twin round steel-link chains	Bionic tendon	Bionic tendon	Twin round steel-link chains	Twin round steel-link chains	Bionic tendon	Twin round steel-link chains	
• Bionic tendon			• Bionic tendon				
Face/top/eaves	Face/top/eaves	Face/top/eaves	Face/top/eaves	Face/top	Face/top/eaves	Face/top/eaves	
• wall sealing profile	wall sealing profileniche	• wall sealing profile	• wall sealing profile			• aluminium coverboard	
• end cap insert in polished chrome	• valance	• end caps and end cap insert	• LED Spots in the front profile	• valance	• end caps and end cap insert	• shadeplus / drop valance	
• valance	• coupled awning	in polished chome	end caps in polished chrome	Valunce	in polished chome	• valance	
	· ····	• valance	• shadeplus / drop valance		• valance	pitch adjustment gear	
		• coupled awning	• valance		coupled awning	• coupled awning	
		• stretch	coupled awning		• stretch	- · · · · · · · · · · · · · · · · · · ·	
			• stretch				
markilux format Wind protection and extra privacy Page 46 Individual unit: max. 300 × 250 cm, can be extended Fixture type: patio demarcation, fixed to footings, awning system element			markilux 790 Side screen Page 48 Extension: max. 450 cm, height: 90 – 250 cm Operation: manual operation; Fixture type: can be fitted to a wall or in a niche				
Options: Opt							

markilux awning systems

	markilux pergola	markilux pergola compact	markilux planet	markilux markant	markilux syncra	markilux construct
						Tight you have to be
Max. width × projection	600 × 450 cm	450 × 400 cm	600/610 × 300 cm	600 × 600 cm (2 fields)	Up to 60 m ²	Almost unlimited
	500 × 600 cm		500/510 × 350 cm	300 × 600 cm (1 field)	depending on the awning model	
Awning system	pergola	pergola	Awning-cum-parasol	Textile weather protection	Awning stand system	Frame system
	tracfix cover guidance	tracfix cover guidance	with one	Free-standing, purist in design,	with two posts	modular and flexible
	with lateral guide tracks	with lateral guide tracks	markilux designer awning	on four posts with	and one/two	
	on slim posts	on slim posts	as desired	integrated designer awning	markilux designer awnings	
					or pergolas as desired	
Operation	Hard-wired motor	Hard-wired motor	Depending on the awning model	Radio-controlled motor*	Depending on the awning model	Depending on the awning model
optional	• silentec motor	• radio-controlled motor*				
	• radio-controlled motor*					
Arm technology	-	-	Depending on the awning model	-	Depending on the awning model	Depending on the awning model
Fixture type	Face/top/eaves	Face/top/eaves	Free-standing	Free-standing	Free-standing	Free-standing
	• wall sealing profile	• wall sealing profile	on concrete foundations	on concrete foundations	on concrete foundations	on concrete foundations
				or attached to a wall	or stabilisation boxes	
Options**			Depending on the awning model		Depending on the awning model	Depending on the awning model
	❶ LED Line/LED Spots	⊕ LED Line/LED Spots	flex (335° pivoting)	❶ LED Line/LED Spots	• uno	• vertical roller blinds
	• shadeplus / drop valance	• shadeplus / drop valance (manual)	• shadeplus / drop valance	• wall sealing profile	• flex	• wind protection and extra privacy
	• wind protection and extra privacy	• wind protection and extra privacy	• base plate covers	• vertical roller blinds	• round or square posts	• panoramic window
	• round or square posts	• round or square posts		• wind protection and extra privacy	• base plate covers	• round or square posts
	 adjustable posts 	• adjustable posts		• panoramic window	• coupled awning	• base plate covers
	• stabilisation boxes	• stabilisation boxes				
	• coupled awning					
	* Remote control, smart (app) or intelligent control possible		** Some options cannot be combined			





Nationwide delivery and installation service



6-8 MEADOW CLOSE **ISE VALLEY INDUSTRIAL ESTATE FINEDON ROAD** WELLINGBOROUGH **NN8 4BH**

EMAIL: ENQUIRIES@SAMSONAWNINGS.CO.UK TELEPHONE: (01933) 448844 MON - FRI 8:30AM - 5:30PM



